


Gaszugfeder Z 28-40 V4

Zugkraft F1	500 - 5000 Newton
Progression	40 %
Kolbenstange	Ø 28 mm, W. 1.4404 / AISI 316 L, hartverchromt
Druckrohr	Ø 40 mm, W. 14571 / AISI 316 Ti
Anschlüsse	W. 1.4404 / AISI 316 L

GZ 18

GZ 18

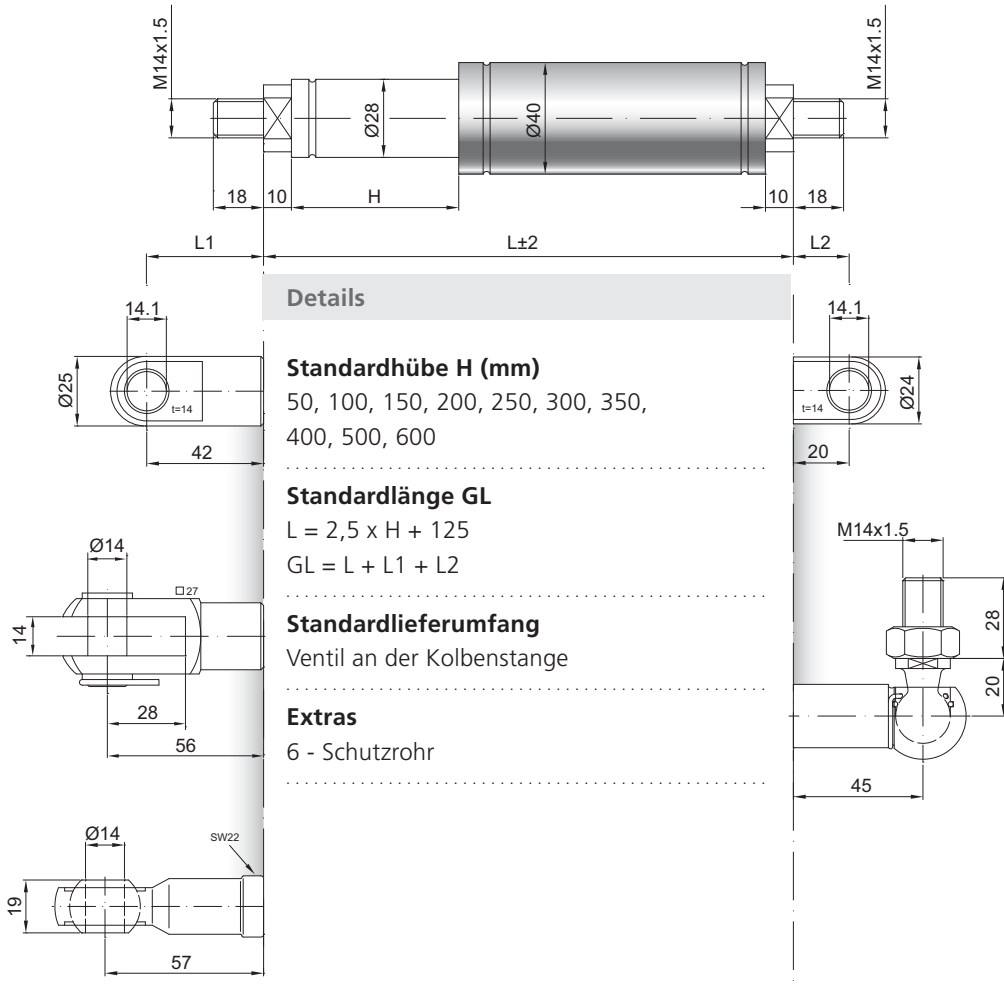

AU 42

AZ 20

GG 56

WG 45

AG 57

Details

Standardhöhe H (mm)
50, 100, 150, 200, 250, 300, 350,
400, 500, 600

Standardlänge GL
 $L = 2,5 \times H + 125$
 $GL = L + L1 + L2$

Standardlieferumfang
Ventil an der Kolbenstange

Extras
6 - Schutzrohr